

Description:


Continuous Thread Metal Closure

Construction:

Tin Plated Steel Innercap

Colors:

Standard is tinfoil. Coated matching to your specific requirement is available.

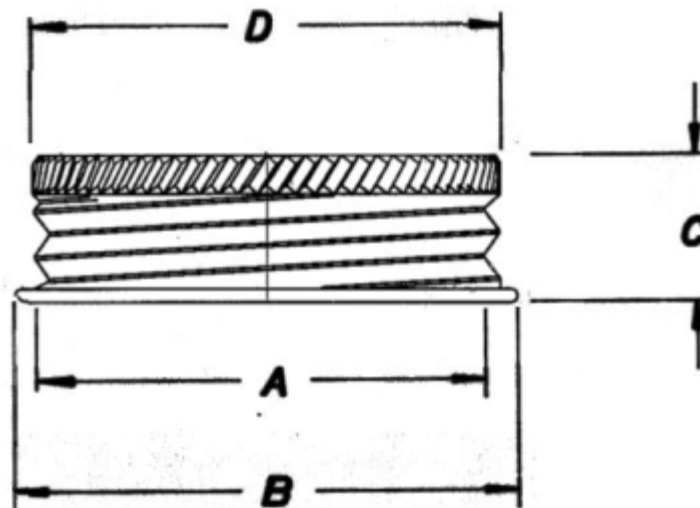

SIZE	A	B	C	D	PITCH	PLATE
1 ¼"	1.300 ^{±.010}	1.466 ^{±.015}	.500 ^{±.010}	1.375 ^{±.015}	7	90 #

DISTRIBUTED BY:



REF NO.:

DWG31380


DISCLAIMER
THIS INFORMATION IS PROVIDED AS A GENERAL GUIDE, INCLUDING DIMENSIONS. IT IS THE CUSTOMER'S RESPONSIBILITIES TO SELECT THE PROPER CONTAINER FOR PRODUCT AND APPLICATION COMPATIBILITY.

DESCRIPTION:

1.25" Alpha Metal Screw Cap, w/.045 Pulp & MF-504

TECHNICAL DATA SHEET

MF 504

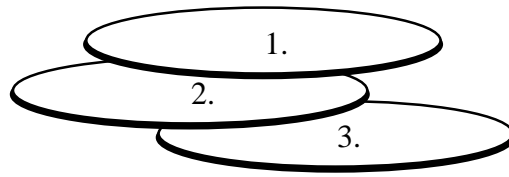

Description: Aluminum Foil is Laminated to White Sulphite Paper, and a Polyester Film laminated to Aluminum Foil. This liner has good resilience and conforms to the contour of the rim of the container. The Polyester Film will face the product directly with excellent solvent, chemical and mechanical resistances. It has a smooth, glossy, and metallic appearance, and is absolutely free of VCM or VDCM.

SPECIFICATIONS

	Material	Thickness [in]	Thickness [mm]
1.	Polyester Film	0.00050	0.0127
2.	Aluminum Foil	0.00035	0.0089
3.	Paper	0.00300	0.0762
	Total Structure	0.004 +/- 0.0004	0.1016 +/- 0.0102

Property	Value
Odor	None Detected
Taste	None Detected
GTR	Near Zero
MVTR	0.1gms. /100 sq.in./24 hrs. at 100°F., 95 % R.H.

Good Resistance to: Weak Acids and Alkalis, Solvents, Vegetable and Mineral Oils.

Poor Resistance to: Strong Acids and Alkalis.

Code of Federal Regulations Compliance: Complies to the following CFR's

21CFR 177.1630

Page 2 of 2

DISTRIBUTED BY:



REF NO.:

DWG31380

DESCRIPTION:

1.25" Alpha Metal Screw Cap, w/.045 Pulp & MF-504

DISCLAIMER

THIS INFORMATION IS PROVIDED AS A GENERAL GUIDE, INCLUDING DIMENSIONS. IT IS THE CUSTOMER'S RESPONSIBILITIES TO SELECT THE PROPER CONTAINER FOR PRODUCT AND APPLICATION COMPATIBILITY.