

## GENERAL INFORMATION

- Manufactured in compliance with ISO-15750-3.
- The Tri-Sure® plugs are standard with the R-profile (G2 only) for optimal un-screwing performance
- Raw Material: Mild Steel
- G2 (50mm) / the thread is ISO-228 compatible
- Finish: Zinc Plated / Platinum or Gold Chromium Colored Passivation. Not suitable for use with food products.
- Black Nitrile-Washer/Gasket: Black Nitrile Rubber (NBR) is resistant to Petroleum oils. Aromatic Hydrocarbons. Mineral oils. vegetable oils and many Acids. Black Nitrile has excellent sealing properties. Black Nitrile is not FDA compatible.
- Standard Execution
- 'Special' option; the components are special packed according customer specification for transport and storage.

## PACKAGING INFORMATION


- Component weight (grams): 59
  - Box Quantity: 250
  - Box Weight (kg)\*: 15
  - Pallet Quantity: 13500
  - Pallet Weight (kg)\*: 864
- (\* = approximate grossweight)

**Material:** Steel

**Finish:** Zinc Plated

- Material thickness: 0.8 mm

- This product is made in accordance with the standard DIN6131 and European standard 12713

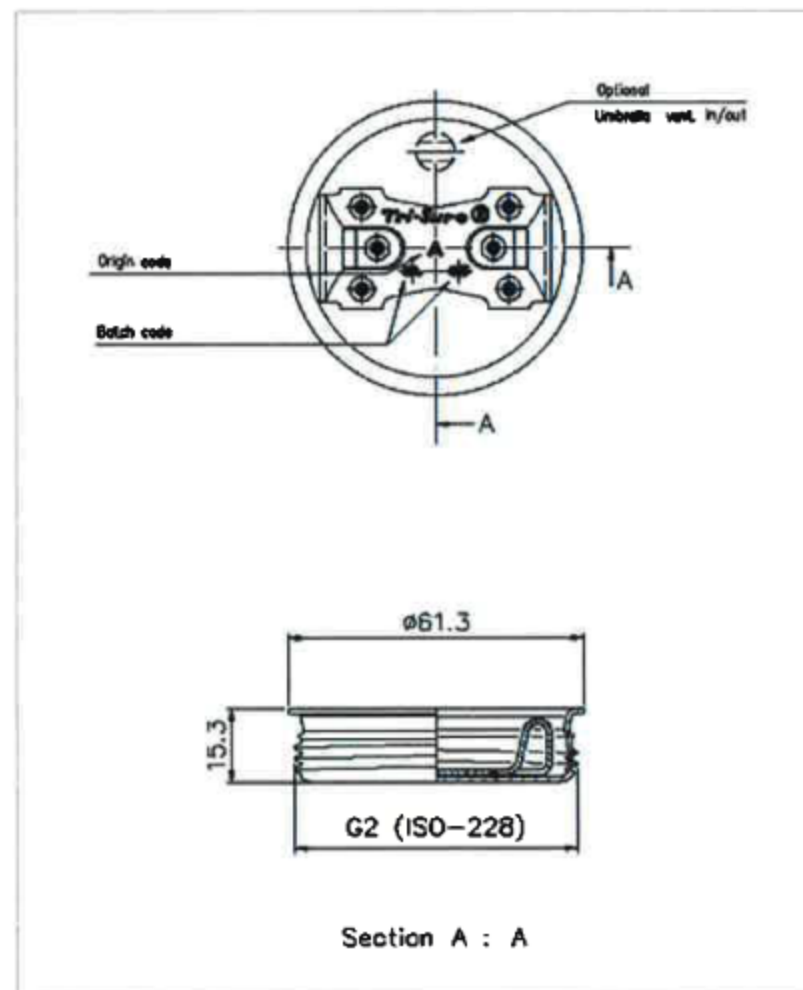

### DISCLAIMER

THIS INFORMATION IS PROVIDED AS A GENERAL GUIDE, INCLUDING DIMENSIONS. IT IS THE CUSTOMER'S RESPONSIBILITY TO SELECT THE PROPER CONTAINER FOR PRODUCT AND APPLICATION COMPATIBILITY.

DISTRIBUTED BY:



Pipeline Packaging

REF NO.:

DWG31802

DESCRIPTION:

2" Metal Tri-Sure Bung, Buna Gasket, Lined