


Fibre Drum

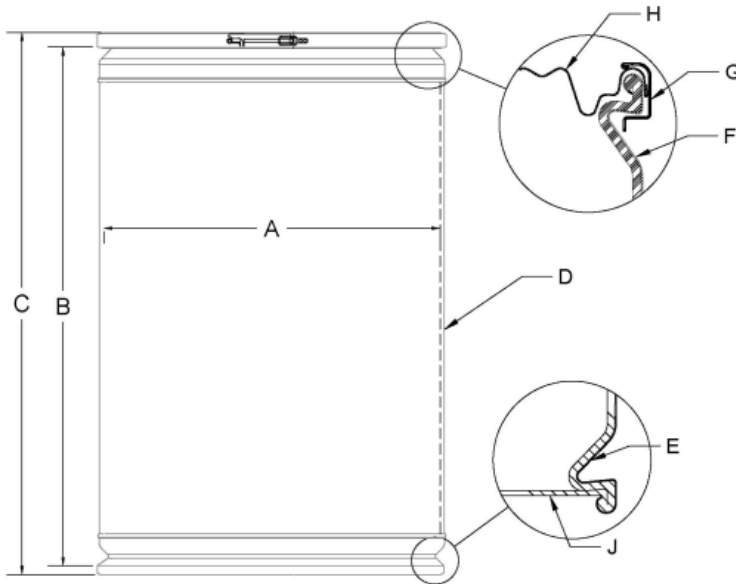

Specification

Drum Type	Lok-Rim
UN Mark	1G/Y190/S
Inside Diameter (A)	21-1/2"
Inside Height (B)	34-1/2"
Outside Height (C)	35-1/2"
Tare Weight (approx)	17.3#
NMFC Net Weight Limit	550# D&S
Nominal Capacity (U.S. Gallons)	55.0 Gallons
Exterior Finish	Plain Kraft
Sidewall Construction (D)	Meeting min thickness of 1000 PSI Mullen
Sidewall Adhesive	Sodium Silicate Between Each Lamination
Lining (D)	N/A
Barrier (D)	N/A
Bottom (J)	.220"/1100# PSI Heading (Thickness/Test)
Chime Band Top (F)	.022 Narrow
Chime Band Bottom (E)	.022 Narrow
Closure (G)	Galvanized Steel
Cover Type (H)	Plastic
Cover - Gasket / Fittings / Diaphragm	Urethane / N/A / N/A
Paint or Skin Color	Not Applicable
Print (Silk Screen)	N/A
Polybag / Bag Option	No Bag
Misc. Treatments	N/A
Special Instructions	Certificate stamp on sidewall with customer specification number below
Mfg Certificate Stamp	550#

DISCLAIMER

THIS INFORMATION IS PROVIDED AS A GENERAL GUIDE, INCLUDING DIMENSIONS. IT IS THE CUSTOMER'S RESPONSIBILITY TO SELECT THE PROPER CONTAINER FOR PRODUCT AND APPLICATION COMPATIBILITY.

DISTRIBUTED BY:



REF NO.:

DWG31759

DESCRIPTION:

55 Gallon Kraft Fiber OH Lok-Rim Drum with Plastic Cover, Lever Lock