


<b>DEFINITION</b>	ET 82 RSB lug cap for vacuum sealing on threaded ring with the following designation:																		
<b>PROFILED PANEL</b>	Regular Twist off with Step and safety Button / RSB																		
<b>SIZES</b>	Please refer to drawing ET 82 RSB at the bottom of the page.																		
<b>METAL</b>	<u>Category:</u> Electrolytic Tin Plate (ETP) <u>Thickness:</u> 0.18 mm / 65 lb/bb <u>Tinning:</u> 2.8/2.8 g/m <sup>2</sup>																		
<b>COMPOUND P27</b>	White PVC based Plastisol.  P27 / Pasteurized (100C / 212F Maximum)  This closure may not be compliant with certain EU regulations. Please consult with Massilly Sales and/or Technical prior to shipping filled product to Europe.																		
<b>INTERIOR PROTECTION</b>	2WHBN / BPANI interior – 2 coat polyester																		
<b>PROTECTION AND EXTERIOR DECORATION</b>	Exterior polyester basecoat / varnish systems available in various colours (clear, gold, white, black)  Customized printing available through art department using agreed upon artwork proof (ref 8.5.1.F15)																		
<b>DECLARATION OF CONFORMITY</b>	BPANI interior coating and compounds are compliant with  - FDA CFR 21.175.300 and FDA CFR 21.177.1210 - ECC No. 1935/2004, EC No. 2023/2006, 2002/72/EC  LIMITATIONS  - 0% Alcohol permitted for BPANI coatings packed with Food Type VI (Beverages) and/or the inclusion of alcohol on the product ingredient list. - undeclared addition of alcohol with all other Food Types is permitted to a maximum 10% (volume) Alcohol																		
<b>STORAGE CONDITIONS AND OPTIMAL USE</b>	Caps / cartons should be stored in conditions with temperature range from 5°C to 35°C without any sudden variation. Caps should be brought to room temperature 24 hours before use. The optimal time of use is two years from the manufacturing date indicated on the carton. Cap cartons should not be stacked greater than 2 pallets high.  Caps are designed to meet a minimum of 2 years packed life.  Please note - Pack must be verified by customer when contents exceed any of the limits below : SO <sub>2</sub> > 100 ppm NaCl > 10% pH < 2.5																		
<b>BUTTON DETAILS</b>	minimum vacuum = 8 inHg																		
<b>ADDITIONAL DETAILS</b>	Please refer to Caps user guide for the Massilly Group (I-QUAL-15-MY-EN 2017-V3.00) regarding caps and their relevant use.																		
<b>ET 82 RSB DRAWING</b>	 <table border="1" data-bbox="115 1402 430 1711"> <thead> <tr> <th>Min</th> <th>Max</th> </tr> </thead> <tbody> <tr> <td colspan="2">Plastisol Height (A)</td> </tr> <tr> <td>0,033</td> <td>0,052</td> </tr> <tr> <td colspan="2">Inside Diameter (B)</td> </tr> <tr> <td>3,072</td> <td>3,090</td> </tr> <tr> <td colspan="2">Cap Height (C)</td> </tr> <tr> <td>0,410</td> <td>0,424</td> </tr> <tr> <td colspan="2">S Dimension (D)</td> </tr> <tr> <td>0,358</td> <td>0,378</td> </tr> </tbody> </table>	Min	Max	Plastisol Height (A)		0,033	0,052	Inside Diameter (B)		3,072	3,090	Cap Height (C)		0,410	0,424	S Dimension (D)		0,358	0,378
Min	Max																		
Plastisol Height (A)																			
0,033	0,052																		
Inside Diameter (B)																			
3,072	3,090																		
Cap Height (C)																			
0,410	0,424																		
S Dimension (D)																			
0,358	0,378																		

**DISCLAIMER**

THIS INFORMATION IS PROVIDED AS A GENERAL GUIDE, INCLUDING DIMENSIONS. IT IS THE CUSTOMER'S RESPONSIBILITIES TO SELECT THE PROPER CONTAINER FOR PRODUCT AND APPLICATION COMPATIBILITY.

DISTRIBUTED BY:

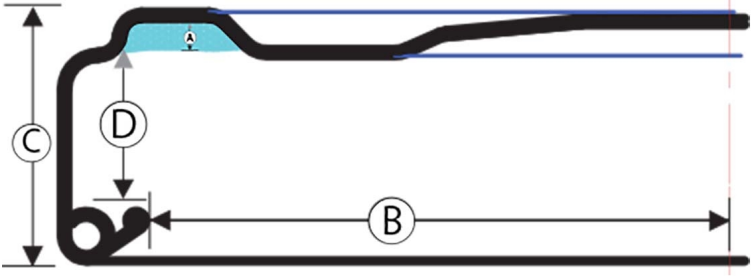

REF NO.:

DWG31336

DESCRIPTION:

82 mm White Metal Lug Cap, Plastisol Liner with Button