


SECTION A-A



SCALE 1:1

REFERENCE	DIMENSION	TOLERANCE	UNITS
Ø E	1.014 [25.76]	±0.007 [0.18]	in [mm]
Ø T'	1.108 [28.14]	±0.007 [0.18]	in [mm]
H	0.699 [17.75]	±0.015 [0.38]	in [mm]
Ø OD	1.232 [31.29]	±0.015 [0.38]	in [mm]
OAH	1.255 [31.88]	±0.015 [0.38]	in [mm]
CRAB CLAW SEAL OD	0.967 [24.56]	±0.010 [0.25]	in [mm]
CRAB CLAW SEAL ID	0.857 [21.77]	±0.010 [0.25]	in [mm]
PART WEIGHT	6.2	± 0.3	g
OPENING FORCE	5.0	± 3.0	lbf
THREAD DETAIL INFORMATION: 6 THREADS PER INCH 0.167" [4.24] PITCH CONTINUOUS THREAD TO UNDERSIDE OF DECK			

DISCLAIMER

THIS INFORMATION IS PROVIDED AS A GENERAL GUIDE, INCLUDING DIMENSIONS. IT IS THE CUSTOMER'S RESPONSIBILITIES TO SELECT THE PROPER CONTAINER FOR PRODUCT AND APPLICATION COMPATIBILITY.

DISTRIBUTED BY:




REF NO.:



DWG 31269

DESCRIPTION:

28-410 White PP Smooth Top Disc Cap, .330 Orifice

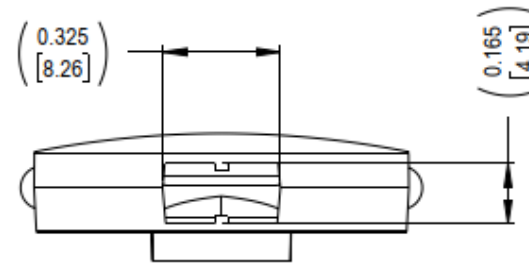


DISPENSING OUTLET
SCALE 2:1

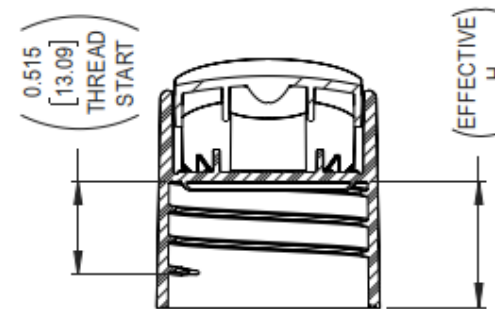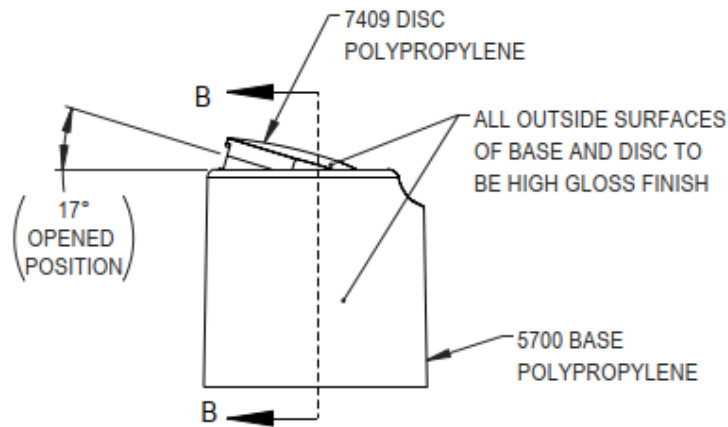

SECTION B-B

EFFECTIVE H DIMENSION IS FOUND BY
SUBTRACTING 0.030" [0.76] FROM
THE H SPECIFICATION.
EFFECTIVE H REPRESENTS
MAXIMUM COMPRESSION OF
SEAL AT RECOMMENDED
APPLICATION TORQUE

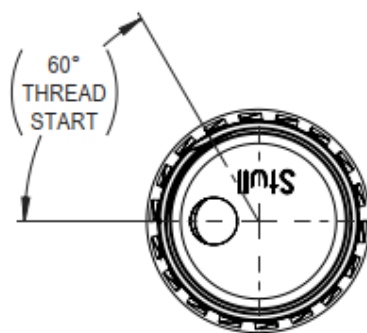

UNSCREWING LUGS TO
APPEAR IN BOTTOM SKIRT

DISCLAIMER

THIS INFORMATION IS PROVIDED AS A GENERAL GUIDE, INCLUDING
DIMENSIONS. IT IS THE CUSTOMER'S RESPONSIBILITIES TO SELECT
THE PROPER CONTAINER FOR PRODUCT AND APPLICATION
COMPATIBILITY.

DISTRIBUTED BY:





REF NO.:




DWG 31269

DESCRIPTION:

28-410 White PP Smooth Top Disc Cap, .330 Orifice

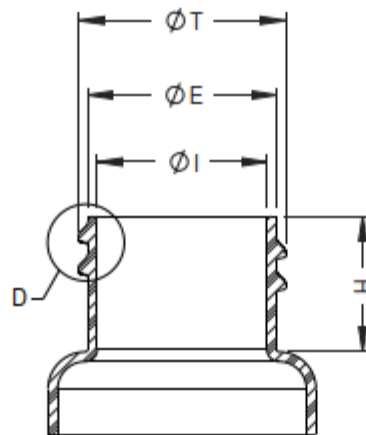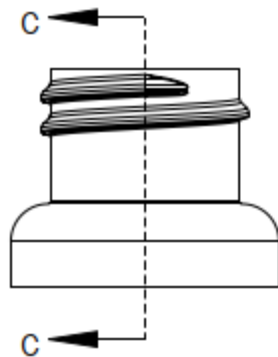

SECTION C-C

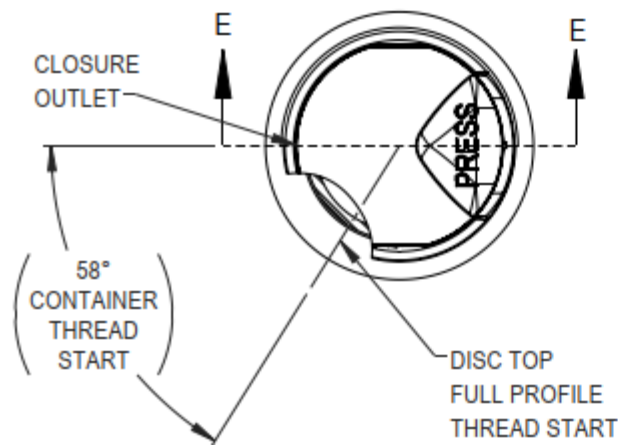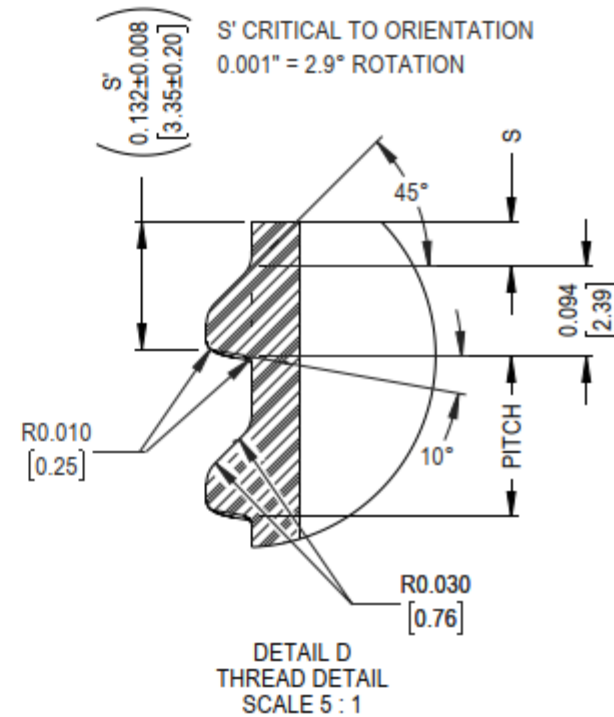

SECTION E-E

DISCLAIMER

THIS INFORMATION IS PROVIDED AS A GENERAL GUIDE, INCLUDING DIMENSIONS. IT IS THE CUSTOMER'S RESPONSIBILITIES TO SELECT THE PROPER CONTAINER FOR PRODUCT AND APPLICATION COMPATIBILITY.

DISTRIBUTED BY:



REF NO.:

DWG 31269

DESCRIPTION:

28-410 White PP Smooth Top Disc Cap, .330 Orifice