


# Fibre Drum

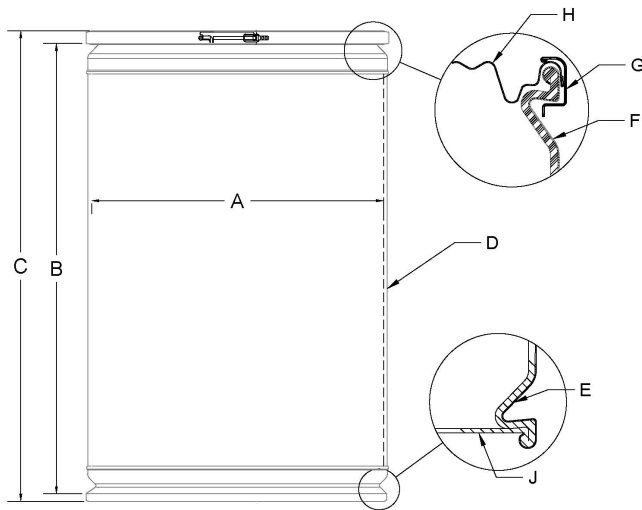

Additional Construction Information	None
Paint or Skin Color	None
Silk Screen Color(s)	None
Poly Bag / Bag Option	None
Misc. Treatments	None
Special Instructions	Certificate stamp on sidewall

## Specification

NMFC Article	Item 296 - Liquid 2A
NMFC Net Weight Limit	600#
UN Mark	None
Drum Type	Liquipak
Inside Diameter (A)	21.5"
Inside Height (B)	37.0625"
Outside Height (C)	38.0625"
Tare Weight (approx)	19#
Nominal Capacity (U.S. Gallons)	55 Gallons
Exterior Finish	Plain Kraft
Sidewall Construction (D)	MIN THICKNESS 1200 PSI MULLEN
Sidewall Adhesive	Sodium Silicate Between Each Lamination
Lining (D)	Heavy Duty Polyethylene
Barrier (D)	None
Bottom Thickness/Test (J)	.240"/1500# PSI HEADING
Chime Band Top (F)	.025 Narrow Stainless Steel
Chime Band Top Overlay	None
Chime Band Bottom (E)	.028 Wide Galvanized Steel
Closure (G)	Galvanized Steel
Cover Type (H)	Plastic
Cover - Gasket / Fittings / Diaphragm	Urethane / 2" & 3/4" Plugs / Removed

DISTRIBUTED BY:



REF NO.:

DWG31774

DESCRIPTION:

55 Gallon Kraft Heavy Duty Fiber OH Drum with PE Lining,  
Plastic Cover with Fittings

## DISCLAIMER

THIS INFORMATION IS PROVIDED AS A GENERAL GUIDE, INCLUDING DIMENSIONS. IT IS THE CUSTOMER'S RESPONSIBILITY TO SELECT THE PROPER CONTAINER FOR PRODUCT AND APPLICATION COMPATIBILITY.