


Fibre Drum

Specification

| | |
|---------------------------------------|---|
| NMFC Article | Item 296 - Liquid 2A |
| NMFC Net Weight Limit | 600# |
| UN Mark | None |
| Drum Type | Liquipak |
| Inside Diameter (A) | 18.5" |
| Inside Height (B) | 32.25" |
| Outside Height (C) | 33.25" |
| Tare Weight (approx) | 14.7# |
| Nominal Capacity (U.S. Gallons) | 35 Gallons |
| Exterior Finish | Plain Kraft |
| Sidewall Construction (D) | Min Thickness 1200 PSI Mullen |
| Sidewall Adhesive | Sodium Silicate Between Each Lamination |
| Lining (D) | Heavy Duty Polyethylene |
| Barrier (D) | None |
| Bottom Thickness/Test (J) | .240"/1500# PSI Heading |
| Chime Band Top (F) | .022 Narrow Galvanized Steel |
| Chime Band Top Overlay (F) | None |
| Chime Band Bottom (E) | .028 Wide Galvanized Steel |
| Closure (G) | Galvanized Steel |
| Cover Type (H) | Plastic .060"/.090" |
| Cover - Gasket / Fittings / Diaphragm | Urethane / 2" & 3/4" Plugs / Removed |

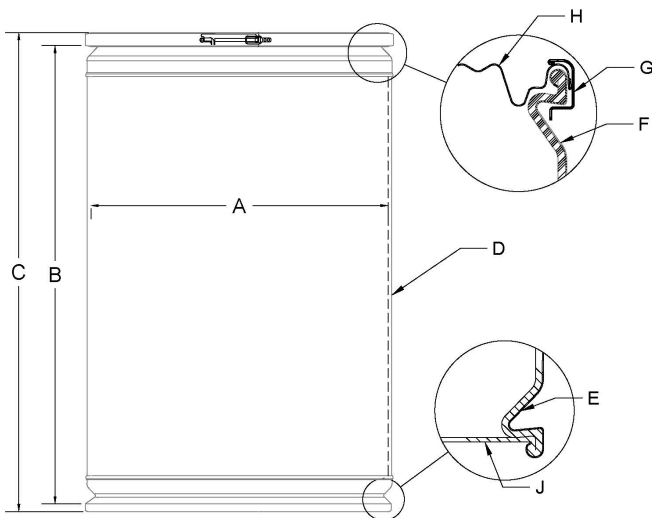

| | |
|-------------------------------------|-------------------------------|
| Additional Construction Information | None |
| Paint or Skin Color | None |
| Silk Screen Color(s) | None |
| Poly Bag / Bag Option | None |
| Misc. Treatments | None |
| Special Instructions | Certificate stamp on sidewall |

DISCLAIMER

THIS INFORMATION IS PROVIDED AS A GENERAL GUIDE, INCLUDING DIMENSIONS. IT IS THE CUSTOMER'S RESPONSIBILITY TO SELECT THE PROPER CONTAINER FOR PRODUCT AND APPLICATION COMPATIBILITY.

DISTRIBUTED BY:



REF NO.:

DWG31775

DESCRIPTION:

35 Gallon Kraft Fiber OH Drum with Plastic Cover