

Notes: The photo shown below may or may not be identical to the description given.

Dimensions

Fitting Centers	17.5"
Outside Diameter (+/- 1/16"	23.0"
Inside Diameter (+/- 1/16")	22.5"
Height (+/- 1/8")	34.5"
Weight (+/-3%)	38.2"

Material

Head	1.0 mm CRCQ Steel
Body	1.0 mm CRCQ Steel
Bottom	1.0 mm CRCQ Steel
*All Steel tolerances conform to ISO3574	

Head Fittings

Flanges	3/4" X 2" RK NYL Flanges
Plugs	3/4" X 2" RK Nylon Plugs with GRY WEPT Gasket
Capseals	

Closing Ring

Ring	N/A
Bolt	N/A
Nut	N/A
Gasket	N/A

Interior

Coating	L5 oD Phenolic (G7)
	Clean, Dry

Exterior Coating

Top	Black
A Panel	Black
B Panel	Black
C Panel	Black
Bottom	Recycle Grey

Slikscreen N/A


Embossing 1A1/X1.8/300/YR/10

Inkjet 1A1/X1.8/300/YR USA-M/4599 jjj

Use old style RK Fittings/Sleeve every other drum/Full Orders/Trailer must be clean out/"Drums have a one-year shelf l controlled ambient temperatures. Lining must be verified for compability with products. Drums should be used as ship and not intended tern storage."

Special Instructions

NOTE FOR ADDITIONAL COMPONENT INFORMATION OR OTHER COMPONENT OPTIONS PLEASE REFERENCE MAUSER COMPONENT PRODUCT DESCRIPTION SHEETS

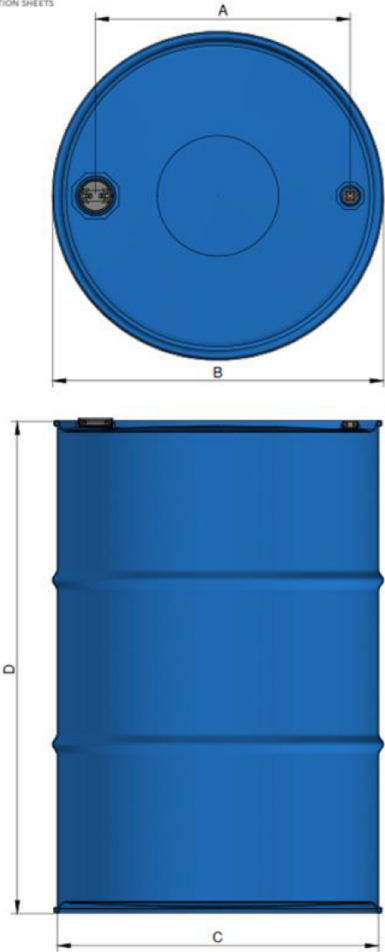

DISCLAIMER

THIS INFORMATION IS PROVIDED AS A GENERAL GUIDE, INCLUDING DIMENSIONS. IT IS THE CUSTOMER'S RESPONSIBILITIES TO SELECT THE PROPER CONTAINER FOR PRODUCT AND APPLICATION COMPATIBILITY.

DISTRIBUTED BY:



REF NO.:

DWG10447

DESCRIPTION:

55 Gal Steel Tight Head Drum