

SECTION A-A

THREAD DETAIL INFORMATION 6 THREADS PER INCH, 0.167 PITCH 450° (1 1/4 TURNS FULL DEPTH THREAD)			
REFERENCE	TOLERANCE	DIMENSION	UNITS
T	±0.015 [0.38]	1.640 [41.66]	in [mm]
E	±0.015 [0.38]	1.550 [39.37]	in [mm]
I	±0.015 [0.38]	1.440 [36.58]	in [mm]
S'	±0.015 [0.38]	0.098 [2.49]	in [mm]
H	±0.015 [0.38]	0.400 [10.16]	in [mm]
OAH	±0.015 [0.38]	1.607 [40.82]	in [mm]
MAXIMUM OD	±0.015 [0.38]	1.683 [42.75]	in [mm]
PART WEIGHT	±1.50	8.80	g
MAXIMUM VOLUME	±5%	1.35 [40.0]	oz [cc]

STATIC TORQUE RECOMMENDATION  
17-27 in-lbs

THIS REQUIREMENT MAY VARY DEPENDING  
UPON BOTTLE MATERIAL, NECK FINISH, AND  
CAPPING EQUIPMENT

DISCLAIMER

THIS INFORMATION IS PROVIDED AS A GENERAL GUIDE, INCLUDING  
DIMENSIONS. IT IS THE CUSTOMER'S RESPONSIBILITIES TO SELECT THE PROPER  
CONTAINER FOR PRODUCT AND APPLICATION COMPATIBILITY.

DISTRIBUTED BY:






REF NO.:

DWG31583

DESCRIPTION:

1 oz Clear PS Straight Side Jar, 43-400

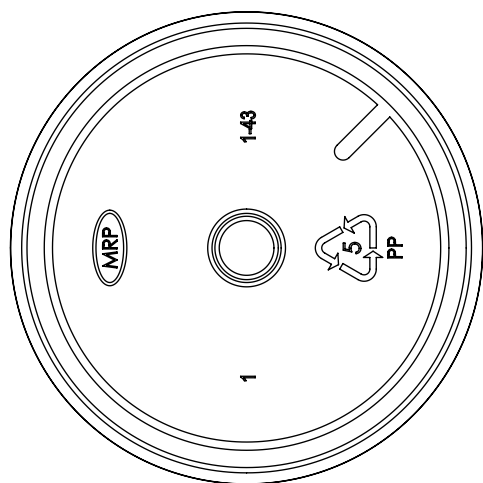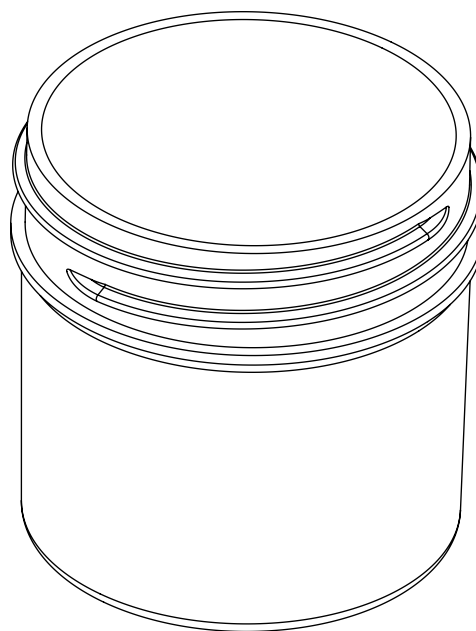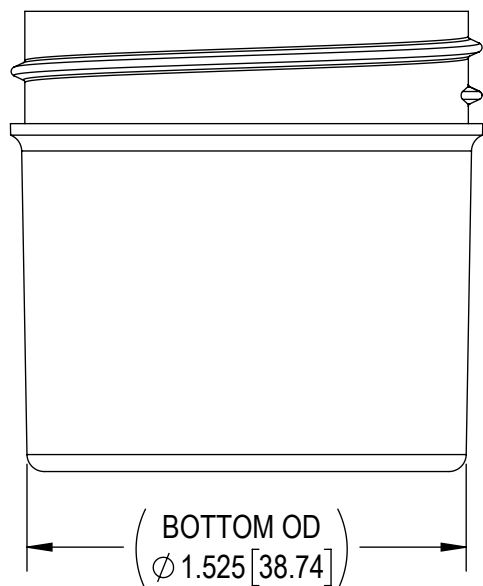

DISCLAIMER

THIS INFORMATION IS PROVIDED AS A GENERAL GUIDE, INCLUDING DIMENSIONS. IT IS THE CUSTOMER'S RESPONSIBILITIES TO SELECT THE PROPER CONTAINER FOR PRODUCT AND APPLICATION COMPATIBILITY.

DISTRIBUTED BY:



REF NO.:

DWG31583

DESCRIPTION:

1 oz Clear PS Straight Side Jar, 43-400