



DETAIL B
SCALE 4 : 1

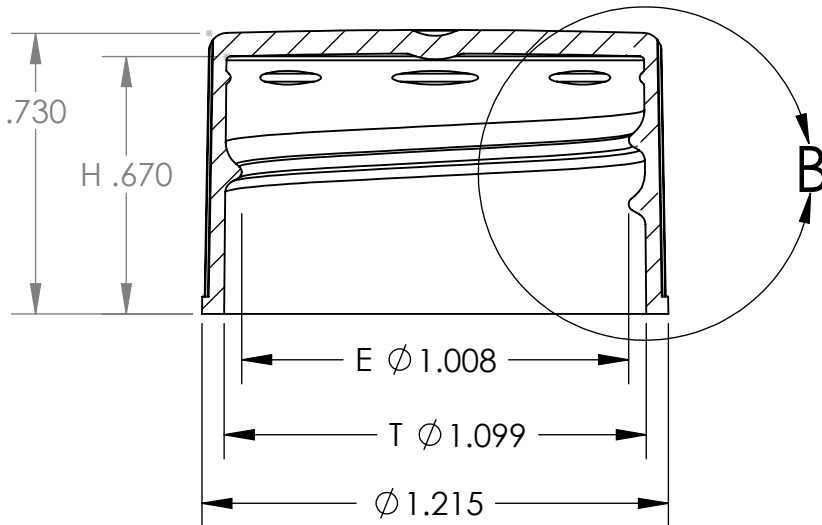

6 THREADS PER INCH
.167 LEAD 1 1/4 TURNS

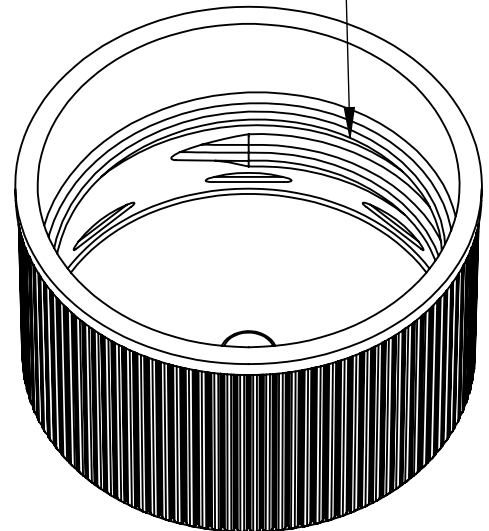

DISCLAIMER

THIS INFORMATION IS PROVIDED AS A GENERAL GUIDE, INCLUDING DIMENSIONS. IT IS THE CUSTOMER'S RESPONSIBILITIES TO SELECT THE PROPER CONTAINER FOR PRODUCT AND APPLICATION COMPATIBILITY.

DISTRIBUTED BY:



REF NO.:

DWG31529


DESCRIPTION:

28-410 Black PP Plastic Matte Top, Ribbed Side Cap,
.020" Heat Seal for PET

FoilSeal™ Technical Data Sheet

.020" Pulp FS 3-25

Revision: FS325-09252013

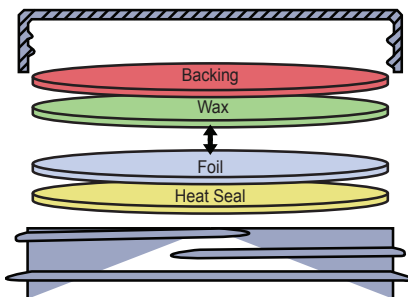Product	.020" Pulp FS 3-25		
Scope	Two piece pulp backed heat induction foil innerseal will provide an aggressive bond with clean peel removal from PET and PVC containers. (.0005" foil version of FS 3-19). Easy access / "puncture foil" when wax bonded to pulp.		
Composition	Material	Standard	Metric
	Backing	.020"	.508 mm
	Wax	-	-
	Foil	.0005"	.0127mm
	Heat Seal	.0005"	.0127mm
			
			Adhesive or resin bonding layers not shown.
FDA Status: 21 CFR 177.1210		Recommended Storage and Handling: Refer to Website	
Drug Master File (DMF): #4544		EU / EP Reg.:	
GTR Oxygen: Essentially Zero		MVTR: Essentially Zero	
Print Location (if any): Foil Layer and/or Heat Seal Layer			

Selig materials are compliant with current USFDA Food allergen Guidelines.

Selig materials are compliant with California Proposition 65 labeling requirements.

Selig materials are compliant with limitation of heavy metals in packaging per CONEG & EU 94/62/EC, article 11.

MSDS's are not required as Selig is not a chemical manufacturer or distributor and our products are 'articles' intended for food packaging per 29 CFR 1910.1200 (HazCom).

Page 2 of 2

DISTRIBUTED BY:



REF NO.:

DWG31529

DISCLAIMER

THIS INFORMATION IS PROVIDED AS A GENERAL GUIDE, INCLUDING DIMENSIONS. IT IS THE CUSTOMER'S RESPONSIBILITIES TO SELECT THE PROPER CONTAINER FOR PRODUCT AND APPLICATION COMPATIBILITY.

DESCRIPTION:

28-410 Black PP Plastic Matte Top, Ribbed Side Cap, .020" Heat Seal for PET