

## SHALLOW SKIRTED CLOSURES

# 28-400-62 S



## Specifications:

**DIAMETER** 28 mm

**THREAD PROFILE** 400

**NECK FINISH** 28-400

**CLOSURE TOP** Stipple

**CLOSURE SIDEWALL** Fine Ribbed

**MATERIAL** PP

## PACKAGING & FREIGHT INFORMATION

PACK TYPE	PCS/CTN	CTNS/PALT	PCS/PALT	CTN WT*	PALT WT*	FRT CLASS
Bulk	6,250	15	93,750	33 <sup>(1)</sup>	491 <sup>(1)</sup>	100 <sup>(1)</sup>
Bulk	6,250	15	93,750	36 <sup>(2)</sup>	535 <sup>(2)</sup>	92.5 <sup>(2)</sup>
<b>CARTON DIMENSIONS:</b> 24 x 8 x 15				<b>PALLET DIMENSIONS:</b> 48 x 40 x 50		

(1) Unlined Closures (2) Lined Closures \*Approximate

## MARKETS

Automotive and Medical Products, Household Chemicals, Cosmetics, Food, Personal Care, and Pharmaceuticals.

## OPTIONS

Available in white, standard colors and custom colors. Can be lined with a wide variety of liner systems including SureSeal (foam), pressure sensitive and heat induction (foil) liners.

## CLOSURE BENEFITS

- A great general-purpose closure
- Fine-ribbed sides are easier to grip
- Popular for cosmetics
- Our most popular closure style

### DISCLAIMER

THIS INFORMATION IS PROVIDED AS A GENERAL GUIDE, INCLUDING DIMENSIONS. IT IS THE CUSTOMER'S RESPONSIBILITIES TO SELECT THE PROPER CONTAINER FOR PRODUCT AND APPLICATION COMPATIBILITY.

DISTRIBUTED BY:



REF NO.:

DWG31710

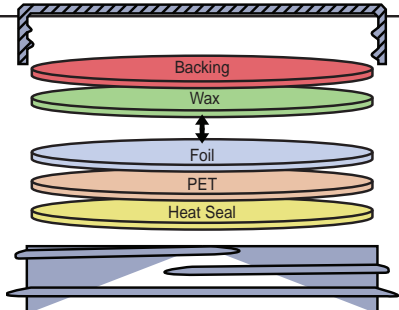
DESCRIPTION:

28-400 PP Ribbed Sides Screw Cap with 020 FMS-1 Liner

# FoilSeal™ Data Sheet

.020" Pulp FSM-1

Revision: FSM1-06042010

Product	.020" Pulp FSM-1																				
Scope	Two piece pulp backed heat induction foil innerseal that will provide a tamper-evident bond to PE containers.																				
Composition	<table><thead><tr><th>Material</th><th>Standard</th><th>Metric</th></tr></thead><tbody><tr><td>Backing</td><td>.020"</td><td>.508 mm</td></tr><tr><td>Wax</td><td>-</td><td>-</td></tr><tr><td>Foil</td><td>.001"</td><td>.0254mm</td></tr><tr><td>PET</td><td>.0005"</td><td>.0127mm</td></tr><tr><td>Heat Seal</td><td>.0015"</td><td>.0381mm</td></tr></tbody></table>	Material	Standard	Metric	Backing	.020"	.508 mm	Wax	-	-	Foil	.001"	.0254mm	PET	.0005"	.0127mm	Heat Seal	.0015"	.0381mm		
Material	Standard	Metric																			
Backing	.020"	.508 mm																			
Wax	-	-																			
Foil	.001"	.0254mm																			
PET	.0005"	.0127mm																			
Heat Seal	.0015"	.0381mm																			

Composition does not include adhesive, resin or wax bonding layers (if any).

Composition does not include adhesive, resin or wax bonding layers (if any).

<b>FDA Status:</b>	21 CFR 177.1210	<b>Recommended Storage and Handling:</b>	
<b>Drug Master File (DFM):</b>	#4544	<b>Canadian DMF:</b>	<b>EU / EP Reg.:</b>
<b>GTR Oxygen:</b>	Essentially Zero	<b>MVTR:</b>	Essentially Zero
<b>Print Location (if any):</b>	Foil Layer and/or Heat Seal Layer		

Selig materials are compliant with current USFDA Food allergen Guidelines.  
Selig materials are compliant with California Proposition 65 labeling requirements.  
Selig materials are compliant with limitation of heavy metals in packaging per CONEG & EU 94/62/EC, article 11.

MSDS's are not required as Selig is not a chemical manufacturer or distributor and our products are 'articles' intended for food packaging per 29 CFR 1910.1200 (HazCom).

## DISCLAIMER

THIS INFORMATION IS PROVIDED AS A GENERAL GUIDE, INCLUDING DIMENSIONS. IT IS THE CUSTOMER'S RESPONSIBILITIES TO SELECT THE PROPER CONTAINER FOR PRODUCT AND APPLICATION COMPATIBILITY.

DISTRIBUTED BY:



REF NO.:

DWG30710

DESCRIPTION:

28-400 PP Ribbed Sides Screw Cap with 020 FMS-1 Liner