

TECHNICAL DATA

Capacity under lid 13lt / 3.5gal

Lid LRT1922 - Tear Strip Lid
LRF1920 - Tear Strip with Flexspout
LFV1920 - Tear Strip with Flexspout and Vent
SLR3 - Snap on Lid

Wall Thickness	Pail PR1300	2.29mm	0.090in
	Lid LRT1922	2.03mm	0.080in
	Lid LRF1920	2.03mm	0.080in
	Lid LFV1920	2.03mm	0.080in
	Lid SLR3	1.93mm	0.076in

Weight (approx.) without bail	Pail PR1300	690g	24.34oz
	Lid LRT1922	246g	8.67oz
	Lid LRF1920	248g	8.74oz
	Lid LFV1920	248g	8.74oz
	Lid SLR3	171g	6.03oz

Material HDPE

Handle Plastic or Metal

Thermal range -18°C (0°F) to 66°C (150°F)

Printing Dry Offset - Up to 6 Colours,
Heat Transfer Label, In Mold Labelling

Pail Colour Standard in White, other colors available.

TOP LOADING RESISTANCE

60kg (132lbs) at 23°C (73°F), 30 days, product temperature when filling pails and warehouse temperature will affect pail performance. Hofmann recommends testing prior to full production.

OPENING & CLOSING

TO OPEN: Remove tear strip, then lift cover.

TO CLOSE: Place lid on pail, press on with hands or use a rubber mallet.

RECOMMENDATIONS

Do not exceed pallet edges with pails. Grade A pallets should be used with boards that have tight spacing to ensure proper pail support. To improve stability, release air from pail when applying the lid. Stretch wrapping machine tension should be adjusted to ensure no deformation of the pail. Use slip-sheet to improve pails stability. Hofmann recommends testing prior to full production.

APPROVALS

Virgin materials are approved for food contact and meet FDA (Food and Drug Administration USA) and HPB (Health Protection Branch Canada) regulations.

Handling conditions vary a lot from customer to customer. Tests are recommended throughout the process of denesting, filling, conveying palletization, warehousing, transportation and utilization by intermediaries and users. Specifications can change without notice. Please contact your Hofmann representative to confirm this data.

PRODUCT CODE

PAIL: PR1300

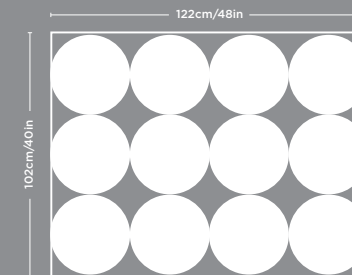
LID: LRT1922, LRF1920, LFV1920,
or SLR3



DIMENSIONS	CM	INCHES
Pail Height	27.71	10.91
Pail Height with Lid	28.44	11.20
Upper width with Lid	30.86	12.15
Lower Width	26.41	10.40

PACKAGING OF EMPTY PAILS & LIDS

- Warehousing of empty pails:
192 per tray - 384 per pallet
- Warehousing of LRT1922/
LRF1920/LFV1920 Lids:
300 per tray - 600 per pallet
SLR3: 1200 per pallet
- Max 2 pallets high for
warehousing of pails
- Max 4 pallets high for
warehousing of lids

**DISCLAIMER**

THIS INFORMATION IS PROVIDED AS A GENERAL GUIDE, INCLUDING DIMENSIONS. IT IS THE CUSTOMER'S RESPONSIBILITIES TO SELECT THE PROPER CONTAINER FOR PRODUCT AND APPLICATION COMPATIBILITY.

DISTRIBUTED BY:



REF NO.:

DWG30422

DESCRIPTION:

3.5 Gallon HDPE Square OH Pail